
FORD TRUCKS 4142D EURO6



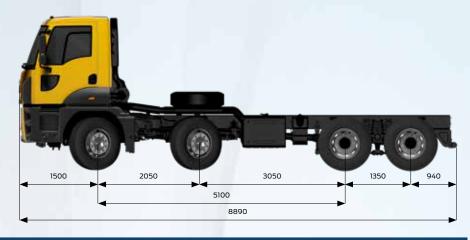

Basic Features	
Vehicle Type	Tipper
Axle	8x4
Emission	Euro 6
Cabin Type	Day Cab
Wheelbase (mm)	5100

Engine	
Type	Ecotorq 12,7 litre
Displacement (cc)	12740
Diameter x Stroke	130 mm x 160 mm
Power	420 PS (308,9 kW) / 1800 rpm
Torque	2150 Nm / 1000-1300 rpm
Compression Ratio	17 +/- 0,5 : 1
Oil Filling Volume	50 L
Coolant Volume	57 L (77 L with Intarder)

Transmission	
Clutch	2 x 400 mmTwin Clutch
Manuel Transmission / Ratios (1. gear - 16. gear)	ZF 16S 2230 (13,805-0,836)
Automated Transmission / Ratios (1. gear - 12. gear)	ZF 12 TX 2210 (16,688-1)

Steering

Power assisted single circuit

Chassis	
Chassis Thickness	10 mm with Reinforcement
Chassis Strength	500 MPa
Suspension (Front / Rear)	90 mm Parabolic Leaf Springs / Multileaf Tandem Suspension
Axle	Hub Reduction
Axle Ratio (Manual / Automatic)	4,87 / 4,08
Tyres	315/80 R 22,5
Wheel Rim	22,5 x 9 Steel
Building Control	

Braking System	
Brakes (Ø mm x mm Length)	410 x 200, Z-Cam Drum Brake System
Braking System	Dual Brake Circuit - Air Processing Unit with Integrated Oil Seperator and Heater
Engine Brake Power	max. 320 kW (Engine Level)
Intarder Power	max. 600 kW / Continuous 160 kW
Electrical System	
Battery	24V, 2 x 12V 150 Ah
Alternator / Starter Motor	130 A / 6.5 kW

Allemator / Starter Motor	150 A 7 0,5 KVV
Tanks	
Fuel Tank	315 L Steel
SCR Tank	55 L



Dimensions (mm)					
Front Overhang			1500		
Wheelbase			5100		
Overall Length			8890		
Distance Between 1st and 2nd Wheel Centers			2050		
Distance Between 2 nd and 3 th Wheel Centers			3050		
Distance Between 3th and 4th Wheel Centers			1350		
Overall Cab Length			1820		
Total Vehicle Height			3245		
Overall Vehicle Width (Excluding Mirrors)			2540		
Chassis Width			770		
Rear Overhang			940		
Useful Chassis Length			6490		
Chassis Height - Front			1185		
Chassis Height - Rear			1186		
Ground Clearance - Front			380		
Ground Clearance - Rear			296		
Turning Radius			10640		
Weights (kg)	1. Axle	2. Axle	3. Axle	4. Axle	Total
Technically Permissible Weights	8000	8000	13400	13400	41900

3806

4194

8000

STANDARD EQUIPMENT

- · Manuel Air conditioner
- AM/FM/Aux In/USB/Bluetooth (Radio with Bluetooth)
- 4 Points Independent Cab Suspension for Day Cab
- Transmission Offset (single gear) PTO without Flange & Interior Control Unit
- Cruise Control
- Drum Brake

Kerb Weight

GVM (Legal)

Payload

- Engine Brake
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Heated and Air Suspended Driver Seat
- Switchable Air Compressor for Improved Fuel Economy
- Lumbar Support
- Anti-Lock Brake System (ABS)
- Brake Lining Wear Indicator
- Immobilizer
- Single Key with Remote Control and Central Locking
- Home Safe Light
- Approach Light
- Differential Lock
- Digital Tachograph
- Front Towing Hooks (Double Hook)
- Short Bumper
- Fuel Tank Protector

OPTIONAL EQUIPMENT

- Automated Transmission (with Normal Mode, Off-Road Mode, Rocking Mode)
- Engine Driven PTO & Interior Control Unit

2046

11354

9500

• Transmission Direct (double gear) PTO without Flange

2045

11355

9500

11662

30238

32000

Intarder

3765

4235

8000

- ADR Pack
- Auxiliary Cabin Heater (Wet Type)
- Cold Pack with Wet Type Cab Heater and 225 Ah Battery*
- Power Cab Tilting
- Rear Window **
- 4750 mm Wheelbase Version
- Double Passenger Seat
- Extra Heavy Duty Pack (Available With 13R 22,5 Tyre)
- 3,5T Towing Capability
- 10T Towing Capability
- 27T Towing Capability
- Manually Operated Sunroof
- Front Vehicle Antiroll Bar
- Oil Pan Protection
- Multileaf Spring Front Suspension
- Lateral Protection
- Automatic Traction Control (ATC)
- · Reinforced Wheel Rim

^{*} Not Available with 4750 mm Wheelbase Version.

^{**} Not Available with Low Roof Sleeper Cab Version.